


# Chrome metal powder

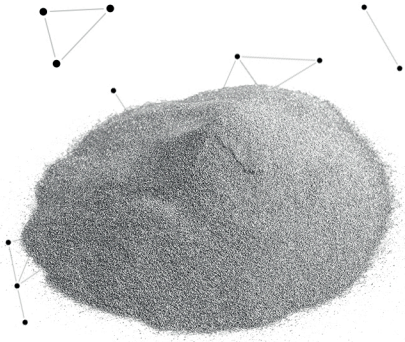

Chrome metal powders are used for production of welding electrodes, flux-cored wires, for thermal spray, aluminium hardeners and powder metallurgy applications.

Grain size distribution and chemical analysis are guaranteed through a strict process and quality control.

## 01 Standard Specifications 100 $\mu\text{m}$ – 250 $\mu\text{m}$ – 300 $\mu\text{m}$

	Al	Fe	Si	C	S	P	Cr
Max (ppm)	2000	3000	1500	200	150	20	Min (%) 99,2%
Typical (ppm)	1000	2000	1000	150	80	10	

## 02 Standard Specifications - fine powders 45 $\mu\text{m}$ – 63 $\mu\text{m}$ – 80 $\mu\text{m}$

	Al	Fe	Si	C	S	P	Cr
Max (ppm)	2000	4000	1500	400	150	20	Min (%) 99,2%
Typical (ppm)	1000	2000	1000	150	80	10	

## 03 Standard Specifications - High purity powders 80 $\mu\text{m}$ – 100 $\mu\text{m}$ – 160 $\mu\text{m}$

	Al	Fe	Si	C	S	P	Cr
Max (ppm)	200	2000	500	400	40	20	Min (%) 99,75%
Typical (ppm)	50	1400	350	120	20	10	

Other specifications are available upon request

## 04 Packing

Steel Drums 500lb / 250kg  
1 MT big-bags

Customs tariff 81122190  
REACH registration no. 01-2119485652-31-0039



## CONTACT

[info@dcx-chrome.com](mailto:info@dcx-chrome.com)

**Head office and plant location**  
**DCX Chrome SAS**  
– Delachaux Group  
68, rue Jean Jaurès  
59770 Marly, France  
Tel +33 3 27 20 07 77

**USA - Delachaux Metal Inc.**  
26 Interstate Drive - P.O. Box 69  
Napoleon, Ohio 43545 - USA  
Phone 631-373-0212

# DCX CHROME

Ⓞ GROUPE DELACHAUX